




Open both side cover

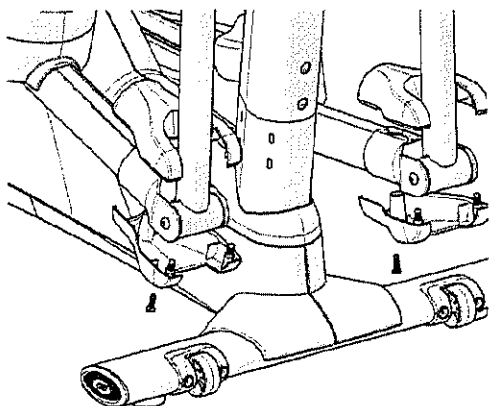


Step 1: Use Phillip screwdriver remove 4 piece Front Foot Plate Tube Front Covers.

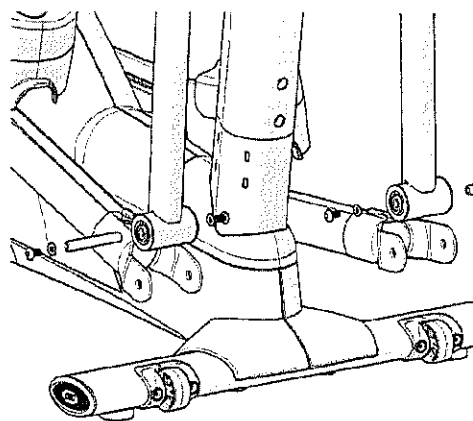


Step 2: Use 2 piece 5mm Allen wrench remove both side Foot Plate Tube Sleeves.

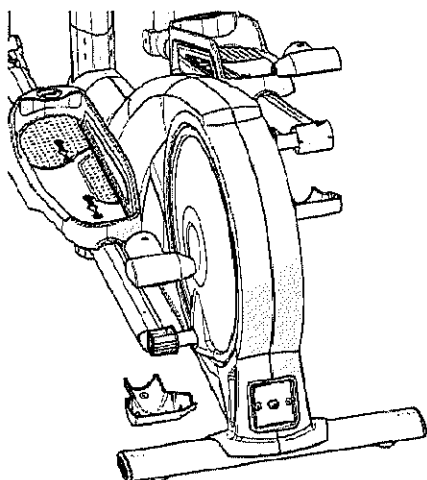


Step 3: Use Phillip screwdriver remove 4 piece Rear Foot Plate Tube Rear Covers.

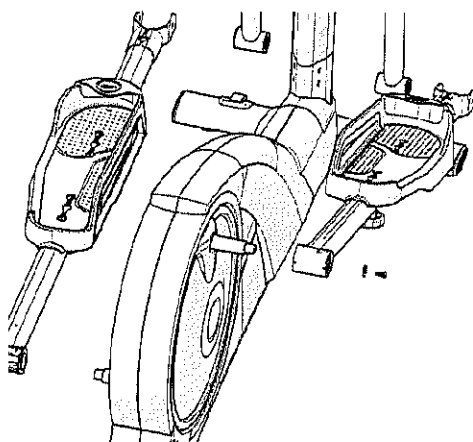


Step 4: Use 10mm socket wrench remove both Foot Plate Tube set.

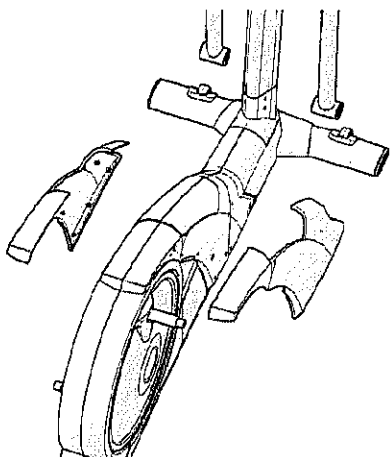


Step 5: Use both hands carefully remove both Side Chain Covers-Front.

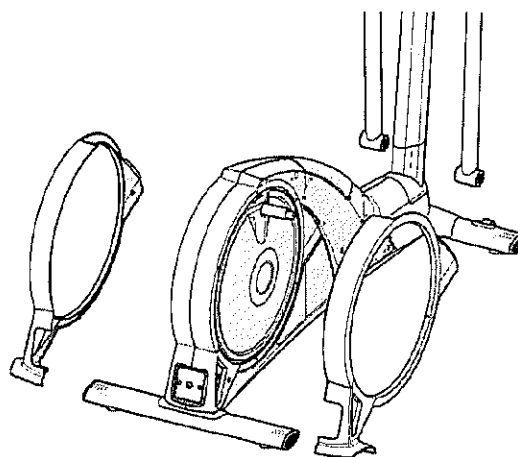


Step 6: Use both hands carefully remove both Side Chain Covers-Rear.

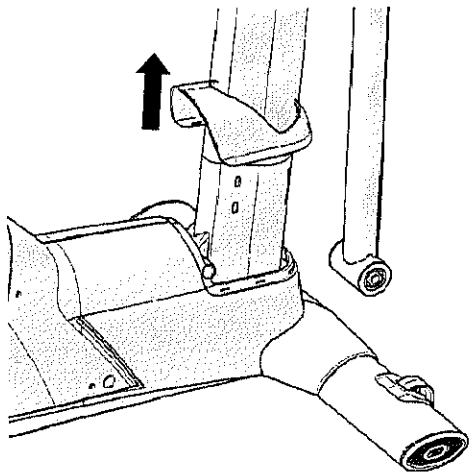


Step 7: Move up Upright Lower Cover .

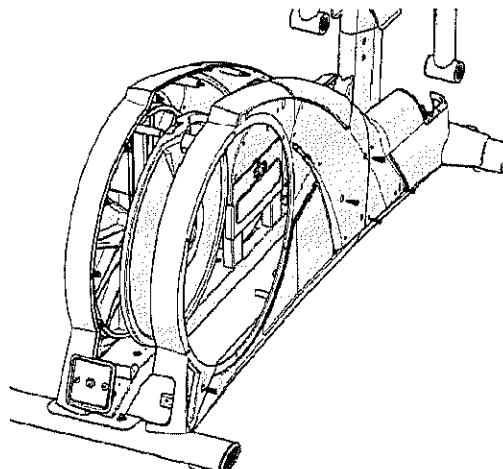

Step 8: Use Phillip screwdriver remove right side Front Chain Cover and Main Chain Cover.

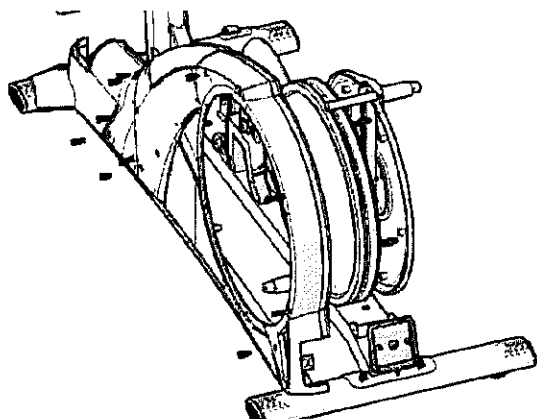

Step 9: Use Phillip screwdriver remove left side Front Chain Cover and Main Chain Cover.

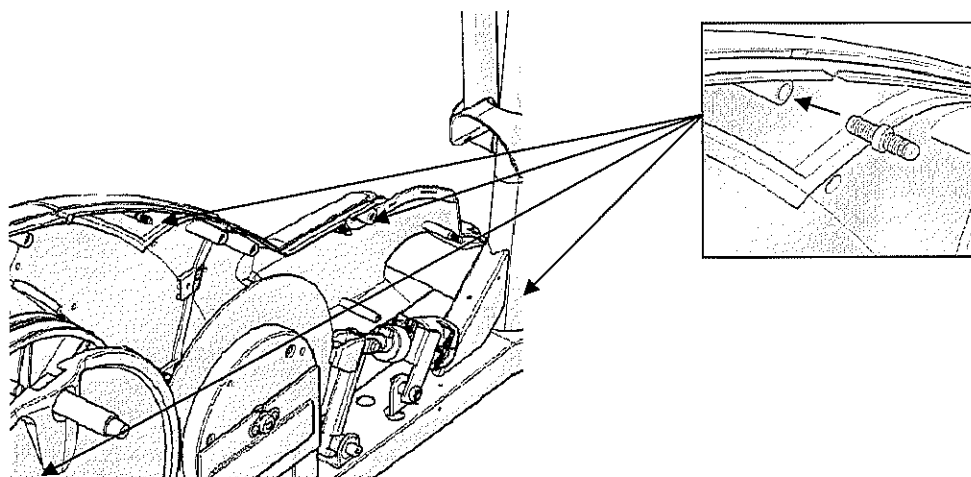

NOTE: When assembly back Main Chain Covers, must confirm plastic bolt be install.