


Safety Key Seat = #105

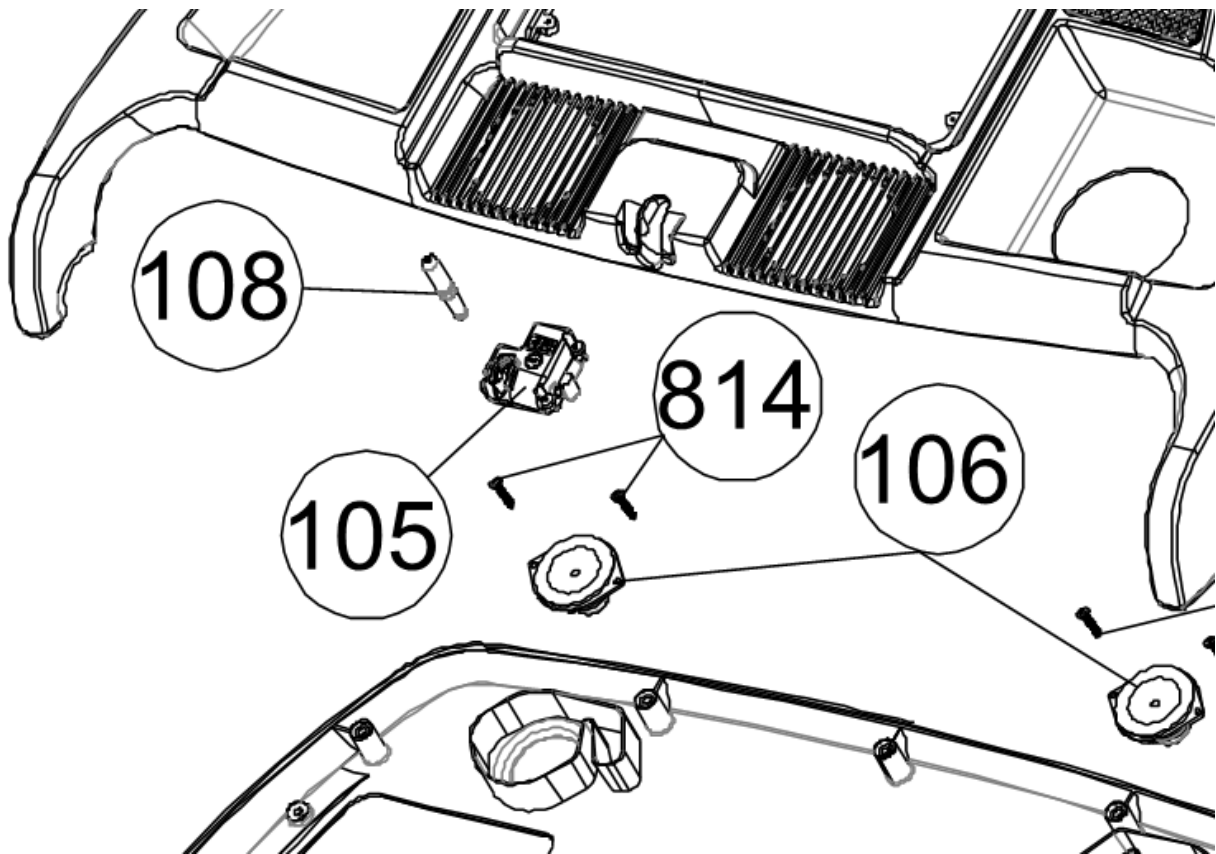

Remove the 2x #814 holding the old seat in place

Unplug the connector on the back of the old seat

Connect the plug to the new seat

Use the 814 screws to re-secure the new seat