

Calibration Guide

600 Series


Models: X6600HRT (EP35), Software Versions 08 - 11

STEP 1 ENTER ENGINEERING MODE

- Begin pedaling the unit until the display window is activated. Hold the **"LEVEL DOWN"** button and the **"WEIGHT UP"** button for about 3 seconds. There should be a series of beeps and "ENG1" should be displayed in the LED display window.

STEP 2 SELECTING BIKE OR ELLIPTICAL MODE

- The MODE is displayed in the TIME window.
- "b"** represents BIKE MODE.
- "--"** represents ELLIPTICAL MODE.
- Press either **"TIME UP"** or **"TIME DOWN"** to change the desired MODE.
- To SAVE the selected mode, press and hold the **"WEIGHT UP"** and **"WEIGHT DOWN"** arrows for about three seconds. You will hear a series of beeps indicating that the values were saved.

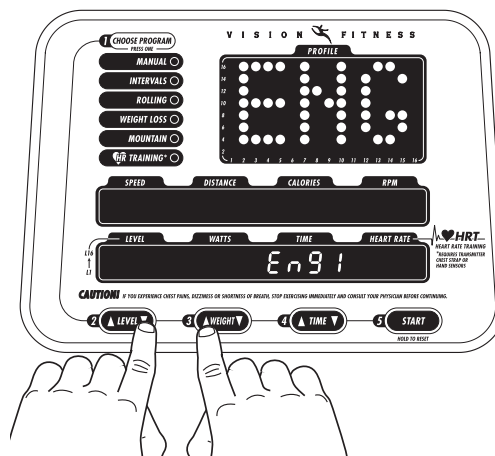


STEP 3 DISPLAY SOFTWARE VERSION

- Software Version is displayed in the TIME window after the MODE.

STEP 4 DISPLAY ENGLISH SYSTEM:0 OR METRIC SYSTEM:1

- English or Metric system is displayed in the SPEED window
- Changing from one system to the other can be done on the back of the console. Please see Owner's Guide for instructions.

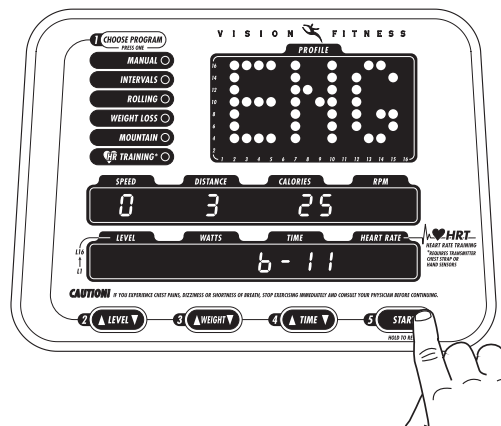

STEP 5 VIEW ACCUMULATED TIME AND ACCUMULATED DISTANCE

- Accumulated TIME is displayed by hours of use in the DISTANCE window.
- Accumulated DISTANCE is displayed by Miles or Kilometers traveled in the CALORIES window.

STEP 6 EXITING ENGINEERING MODE

- Press and hold the **"START"** button for three seconds.

STEP 7 EXITING ENGINEERING MODE MENU

- Press and hold the **"LEVEL DOWN"** and **"WEIGHT UP"** buttons for three seconds.

